


ART. COD.

K 40 DW

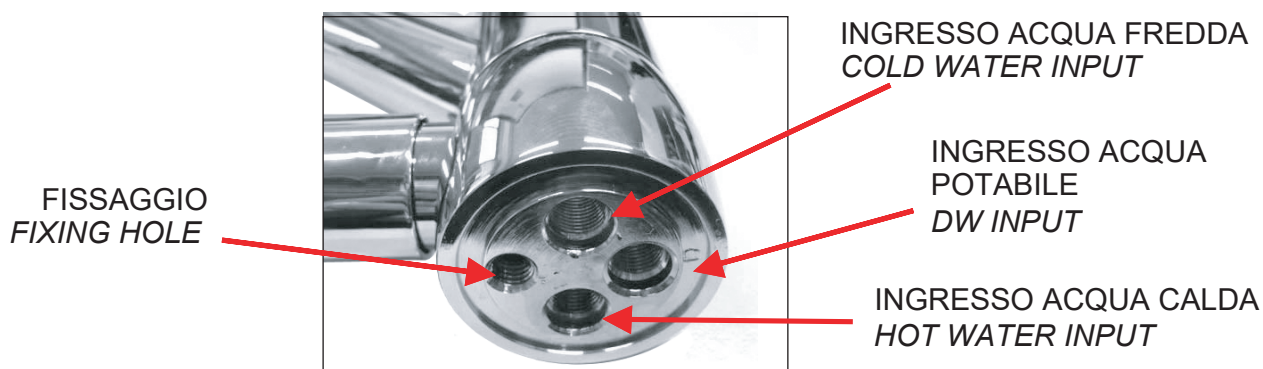

Acqua potabile : chiudere il flusso con la maniglia del miscelatore e girare la leva acqua potabile a SX
Acqua calda /fredda : girare la leva acqua potabile a DX e aprire il flusso con la maniglia del miscelatore

Drinkable water : stop the water flow by the handle and turn the DW handle on the LEFT

Hot/cold water : turn the DW handle on the RIGHT and open water flow by the handle

MATERIALI / MATERIALS

CuZn37 CW 508L UNI EN 12165

CuZn40Pb2 CW617N UNI EN 12165

CuZn39Pb3 CW614N UNI EN 12165

CROMATURA / CHROME PLATING

UNI EN 248

Via Leonardo da Vinci 83 - 20062 Cassano d'Adda (MI) Italy - Tel. +39-0363 364211

info@remer.eu www.remer.eu