
Instructions for Use Radio receiver



for the reception of a flush actuation via radio signal in conjunction with HEWI support hinged handles



Year built (from) 04/2019

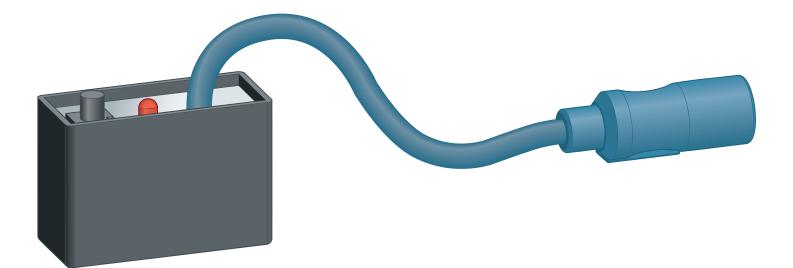

INT

Table of contents

1

About these instructions for use	3
1.1 Target groups	3
1.2 Labelling of notes	3

1.3 About this translated version_____ 4

2

Product information_____ 5

2.1.1	Areas of use	
2.1.2	General notes	
2.2 Produc	ct description	
2.2.1	Overview	(
2.2.2		
2.2.3	Operating mode	
2.2.4	Extensions	

3	Handling	
	3.1 Assembly	
	3.2 Commissioning	10
	3.3 Disposal	11



1 About these instructions for use

Trade mark rights exist for this document; for further information, go to *viega.com/legal*.

1.1 Target groups

The information in this instruction manual is directed at the following groups of people:

Heating and sanitary professionals and trained personnel

Individuals without the abovementioned training or qualification are not permitted to mount, install and, if required, maintain this product. This restriction does not extend to possible operating instructions.

The installation of Viega products must take place in accordance with the general rules of engineering and the Viega instructions for use.

1.2 Labelling of notes

Warning and advisory texts are set aside from the remainder of the text and are labelled with the relevant pictographs.



DANGER!

This symbol warns of possible life-threatening injury.



WARNING!

This symbol warns of possible serious injury.



CAUTION! This symbol warns of possible injury.

_



NOTICE! This symbol warns of possible damage to property.



This symbol gives additional information and hints.



1.3 About this translated version

This instruction for use contains important information about the choice of product or system, assembly and commissioning as well as intended use and, if required, maintenance measures. The information about the products, their properties and application technology are based on the current standards in Europe (e.g. EN) and/or in Germany (e.g. DIN/DVGW).

Some passages in the text may refer to technical codes in Europe/ Germany. These should serve as recommendations in the absence of corresponding national regulations. The relevant national laws, standards, regulations, directives and other technical provisions take priority over the German/European directives specified in this manual: The information herein is not binding for other countries and regions; as said above, they should be understood as a recommendation.



2 Product information

2.1 Intended use

2.1.1 Areas of use

The radio receiver can be used with all electronic Prevista-WC flush plates and WC remote flush actuations.

2.1.2 General notes

Symbols

Observe the symbol listed on the label:

CE	CE marking, Product Safety in Europe
EHC	EAC marking, registration of prod- ucts in the territory of the Cus- toms Union
	Direct current
	Protection class III






The marked product must not be disposed of as household waste.

2.2 Product description

2.2.1 Overview

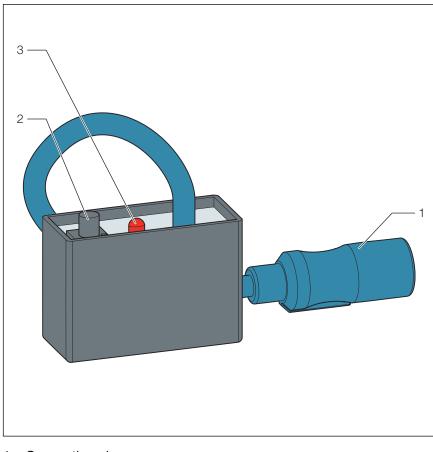

- 1 Connection plug
- 2 Programming button
- 3 LED



2.2.2 Connection diagram

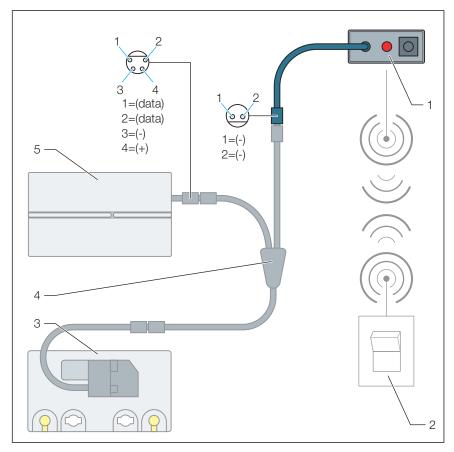


Fig. 1: Connection diagram, radio receiver, WC flush plate for Prevista

- 1 Radio receiver
- 2 Button
- 3 Control with motor
- 4 Extension cable adapter
- 5 WC flush plate for Prevista

2.2.3 Operating mode

Signals to actuate the flush (e. g. on support hinged handles) sent by HEWI radio transmitters can be received by the radio receiver.

Up to 32 transmitters can be connected to a radio receiver.



2.2.4 Extensions



Adapter (model 8570.57)


For connection of a radio receiver.

Multiple external sensors can be connected to a control at the same time using the adapter (model 8570.57). This is how e.g. a button can be combined with the radio receiver.




3 Handling


3.1 Assembly



 \blacksquare Turn the cover plate lock 90° in anti-clockwise direction.




Remove the cover plate.




Connect the Y-cable to the flush plate.






Connect the radio receiver to the Y-cable.

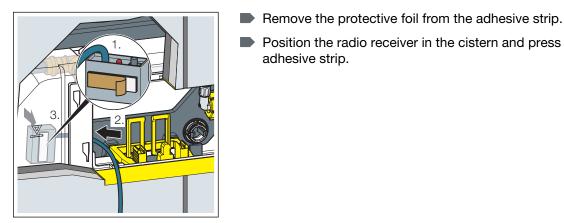

Position the radio receiver in the cistern and press firmly against the

Commissioning 3.2


Programming



- Press the programming button briefly.
 - \square The LED blinks once.

adhesive strip.





- Deleting memory
- 2x

Press the flush button of the radio transmitter to be programmed within 30 seconds.

In the case of dual volume radio transmitters, push one of the two flush buttons.

- \square The LED blinks three times.
- Repeat the process to program additional transmitters (maximum 32 per receiver).

- Keep the programming button pressed for approx. 8 seconds.
 The LED blinks twice.
- Release the programming button.
 - $\hfill \supset$ The radio receiver's memory has been deleted.

3.3 Disposal

Separate the product and packaging materials (e. g. paper, metal, plastic or non-ferrous metals) and dispose of in accordance with valid national legal requirements.



INT • 2019-09 • VPN190169

